

POWER YOUR ADVENTURES.


NEW

Onan P2500i

2500 Watt Digital Inverter Gasoline Portable Generator
2200 Running Watts | 2500 Peak Watts



% FUEL REMAINING | % POWER OUTPUT

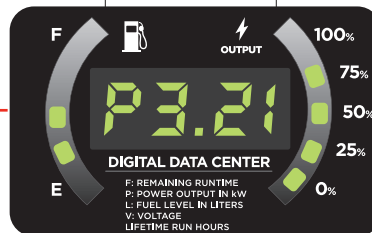

LED DISPLAY

Precise readings to keep you in the know.

AUTOMATIC ROTATING DIGITAL DISPLAY



- **PARALLEL CAPABLE**

Capable of paralleling with another P2500 inverter generator.

- **QUIET & DURABLE**

Double-insulated

- **LIGHTWEIGHT**

Easy to carry

- **KEEPS YOU CONNECTED**

Low THD for clean power—perfect for sensitive electronics

- **FUEL EFFICIENT**

1 gallon fuel tank that runs 10 hrs at 25% load

Cummins
ALWAYS ON

Onan P2500i





Inverter Generator Features and Specifications

- Built-in carry handle for easy transportation
- Parallel capable with another P2500 inverter generator (cable sold separately)
- Two 5V USB ports for charging sensitive electronics such as phones or tablets
- Rubber outlet dust covers
- Dependable 3.4 HP 98cc OHV 4-Stroke engine
- Rubber mat on top for storing electronic devices such as phones while charging
- 3-Year Warranty

| | |
|--|--|
| Part Number | A058U944 |
| Gasoline Peak Watts | 2500 |
| Gasoline Running Watts | 2200 |
| Peak Amps at 120V | 20.8 amps |
| Running Amps at 120V | 18.3 amps |
| AC Voltage | 120 Volts |
| DC Voltage | 5 Volts |
| AC Frequency | 60 Hz |
| Parallel Capable | Yes |
| Engine Horse Power (HP) | 3.4 HP |
| Total Harmonic Distortion (THD) | <3% |
| Automatic Voltage Regulator (AVR) | Yes |
| Starting System | Recoil |
| Battery | No |
| Engine Displacement | 98cc |
| Engine Brand | Ducar |
| Engine Type | OHV 4 Stroke |
| Engine Speed | Variable |
| Engine RPM | Max 5500 |
| Available in True Timber Camo | Yes |
| Operational Volume | As low as 52 dBA |
| Spark Plug (included) | Torch E6RTC |
| Carburetor Kit Required to Operate at Altitude | Yes, above 2000ft |
| Economy Mode Switch | Yes |
| Built-in Inverter | Yes |
| Engine Lubrication | Splash |
| Recommended Oil | SAE 10W30 |
| Oil Bottle Size (included) | .37 qt. (11.8 oz.) |
| Oil Capacity (Quarts/Ounces) | .37 qt. (11.8 oz.) |
| Low Oil Shutdown | Automatic |
| Fuel Type | Unleaded Gasoline, 10% Ethanol or less |
| Fuel Shut Off | Manual |
| Fuel Tank Material | Steel |
| Fuel Tank Capacity (Gallons/Liters) | 1 gal. (3.8 L) |
| Run Time at %25 Load (hrs.) | 10 hrs. |
| Run Time at %50 Load (hrs.) | 8 hrs. |
| Gasoline Fuel Gauge | Yes |

| | |
|---------------------------------------|---------------------------------------|
| Choke type | Manual |
| Choke Location | Control Panel |
| AC Outlets | (1) Duplex 120V 20A (5-20R) |
| DC Outlets | (2) 5V USB ports (1) 12V 8A outlet |
| Ground | Floating Neutral |
| Covered Outlets | Yes |
| Transfer Switch Ready | No |
| GFCI Outlets | No |
| LED Data Center | Yes |
| Overload Protection (circuit breaker) | Yes |
| Handle Style | Single, molded in case |
| Wheel Kit | No |
| Emissions | EPA, CARB |
| Canada CSA Compliant | Yes |
| Spark Arrestor | Yes |
| Residential Warranty | 3 Years |
| Commercial Warranty | 1 Year |
| Assembled Length in. (mm) | 19.75 in. (501.65 mm) |
| Assembled Width in. (mm) | 10.5 in. (266.7 mm) |
| Assembled Height in. (mm) | 18.25 in. (463.55 mm) |
| Carton Length in. (mm) | 21.5 in. (546 mm) |
| Carton Width in. (mm) | 12.75 in. (323.85 mm) |
| Carton Height in. (mm) | 18.75 in. (490 mm) |
| Dry Unit Weight lb. (kg) | 48 lb. (21 kg) |
| Shipping Weight lb. (kg) | 56 lb. (24 kg) |

cummins.com

-  [Instagram.com/Cummins](https://www.instagram.com/Cummins)
-  [Twitter.com/Cummins](https://twitter.com/Cummins)
-  [Facebook.com/Cummins](https://www.facebook.com/Cummins)
-  [YouTube.com/Cummins](https://www.youtube.com/Cummins)

